


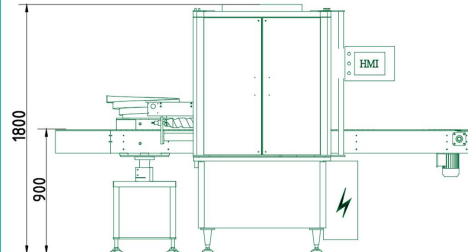


JC-SP

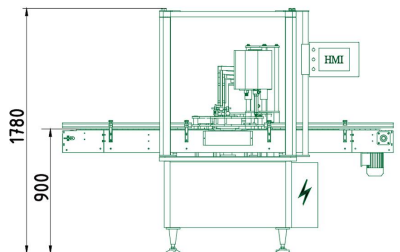

JC-RS6

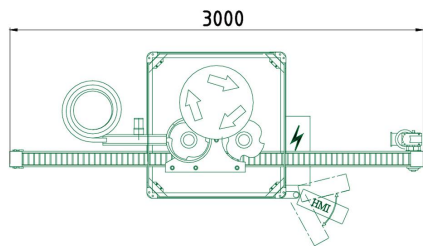


塑膠蓋拴緊系列 "S" series

機 型 Model	JC-SP	JC-CP
封蓋種類 Sealing Type	塑膠拴緊 Screw-Tight plastic	塑膠壓蓋 Press-on plastic
生產速度 Speed (bpm)	30-50	
使用電源 Power Source (VAC)	220V/380V	50HZ/60HZ single phase/3 phase
電機功率 Power Consumption (kw)	1.2	
耗 氣 量 Air Consumption (min)	4-6 Kgs x 72 Liter	
機器重量 Machine Weight (kg)	600	

迴轉式系列 "RS" series

機 型 Model	JC-RS6	JC-RS8	JC-RS10
封蓋種類 Sealing Type	迴旋式塑膠蓋 Screw-Tight plastic		
生產速度 Speed (bpm)	70-90	90-120	120-150
使用電源 Power Source (VAC)	220V/380V	50HZ/60HZ	single phase/3 phase
電機功率 Power Consumption (kw)	1.2		
耗 氣 量 Air Consumption (min)	4-6 Kgs x 72 Liter		
機器重量 Machine Weight (kg)	600		

自動鎖蓋機
Automatic Cap Screwing Machine

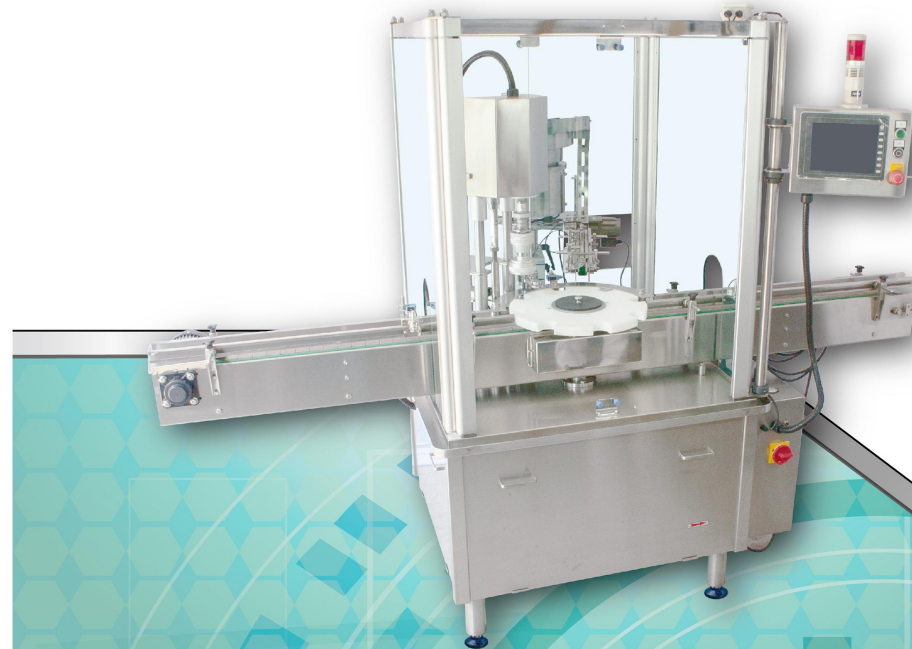

紀正機械有限公司
Jih Cheng Machinery Technologies Co., LTD
新北市樹林區大安路502號7樓

7F, No.502 Da-An Rd, Shulin Dist., New Taipei City 23849, Taiwan
☎ : +886-2-26758968 📠 : +886-2-26758229
✉ : sales@jihcheng.com
www.jihcheng.com

上海紀正機械有限公司
Shanghai Jih Cheng Machinery Mfg Co., LTD
上海市閔行區華漕鎮鳴嘉路318號

318, Mingjia Rd., Huacao Town, MinHang Section, ShangHai, China
☎ : +86-21-52265388 📠 : +86-21-52265658
✉ : sales@jihcheng.com
www.jihcheng.com

JCH-CHENG 紀正機械
Jih Cheng Machinery Tech. Co., Ltd



適用於各類瓶蓋封蓋作業。

Automatic cap sealing machine is suitable for different containers and caps.




Model : JC-S series

自動鎖瓶蓋機

本機是針對各種方式的容器之封蓋作業所設計；美觀、不易損傷瓶蓋，完全符合cGMP之標準。操作簡單，可在短時間內變更不同容器封蓋作業，達到一機數用的成本效益。適用於一般化工、製藥、食品、化妝品以及清潔用品等的自動封蓋作業使用。

Automatic cap sealing machine

The machine is designed for containers of various forms. Being good looking, not damaging bottle and meeting cGMP requirement, it is easy in operation, short change-over time for different container and caps, thus very economical for one-machine-multiple application operation. These automatic capping operations include applications in chemical, pharmaceutical, food, cosmetic and detergent industries.




星盤扭力過載

星盤附有扭力過載跳脫停機安全裝置。

Starwheel over load

For safety, machine stops immediately when starwheel over load.

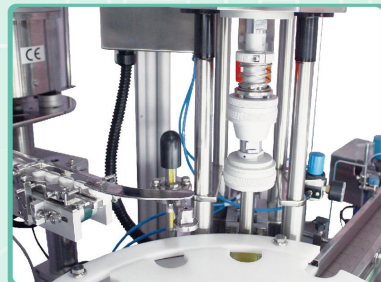

旋蓋

旋蓋位置上設計有瓶子固定裝置，且旋蓋頭設計有扭力調整裝置，可依不同需求自由調整瓶蓋緊實度；旋蓋頭可依瓶蓋尺寸不同，輕易的進行更換。

Cap sealing

There is a bottle clamping device at the sealing station, while the sealing head equipped with adjustable torqus as needed for individual cap & bottle. It is easy in bottle size change-over for different bottle cap size.

迴轉式系列 "R" Series


迴轉式的設計，利用空壓將蓋子吸取，待瓶子定位，塑蓋即進行封蓋，速度快、產能高，能滿足客戶高產量的需求。

Rotary-series

It is a rotary, multi-sealing head design for faster sealing operation to meet customer's high volume requirement.



下外蓋 Capping feeding

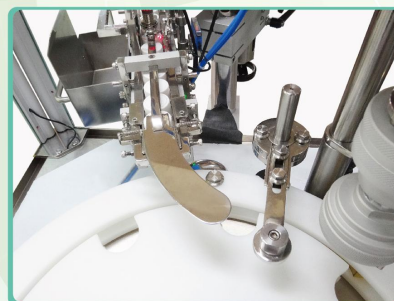


單頭

利用機械手與取蓋擺臂將塑膠蓋勾取至鎖蓋頭下方，再利用空壓將蓋子吸，待瓶子定位，塑蓋即由上往下旋入蓋口。蓋子可以精準及順暢的鎖緊。

Single head

By using a mechanical and swing arm to feed cap to capping head and screw-on the cap from up to down for smoothly action.

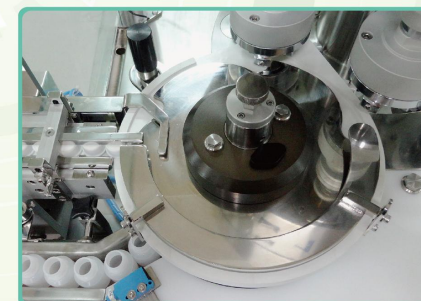

多頭

採用星形盤供蓋設計，方便鎖蓋頭快速取蓋，以達高速鎖蓋要求。

Multi-head

By using starwheel cap feeding design to reach high speed capping requirement.